

T20M系列/T20M Series

- ◎ 材质: 316/316L、高级-316/316L
- ◎ 最大工作压力: 1379 bar(20,000psig)
- ◎ 工作温度: -198℃至427℃ (-325 °F至800°F)
- ◎ 冷拔硬化无缝管
- ◎ 常规供货长度: 1m、2m、3m、6m、40in、80in、10ft、20ft,
- ◎ 可根据客户实际规格定制直管长度与锥面螺纹短管长度
- ◎ Materials:316/316L,enhanced-316/316L
- ◎ Working pressure up to 20,000 psig (1379 bar)
- ◎ Working temperature:-325°F to 800°F(-198°C to 427°C)
- ◎ Cold-drawn seamless tubing
- ◎ Standard length: 40 in, 80 in, 10 ft, 20 ft, 1 m, 2 m, 3 m and 6 m,
- ◎ Straight-length tubing and coned and threaded nipples in custom length are also available.




温压表/Pressure-Temperature Ratings

工作压力 bar (psig)				
-252至 37.8 °C (-423至 100 °F)	93 °C (200 °F)	204 °C (400 °F)	316 °C (600 °F)	427 °C (800 °F)
1379 (20,000)	1379 (20,000)	1310 (19,000)	1241 (18,000)	1158 (16,800)
1034 (15,000)	1034 (15,000)	979 (14,200)	931 (13,500)	869 (12,600)

常温工作压力

Working Pressure at Ambient Temperature

外径 in.	内径 in.	工作压力 bar (psig)
1/4	0.109	1,379 (20,000)
3/8	0.203	
9/16	0.312	
3/4	0.438	
1	0.562	1,034 (15,000)
1 1/2	0.937	

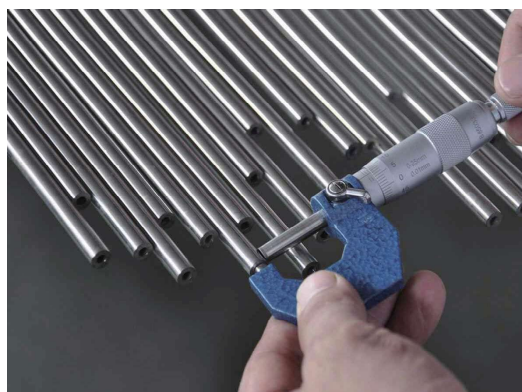

尺寸公差/Dimensional Tolerance

外径 in.	外径公差 in.	内径 in.	内径公差 in.
1/4	-0.002/-0.007	0.109	0/-0.005
3/8	-0.005/-0.01	0.203	
9/16		0.312	
3/4		0.438	+/-0.005
1		0.562	
1 1/2		0.937	



订购信息/Ordering Information

冷拔硬化无缝管/Cold-Drawn Seamless Tubing

外径 in.	内径 in.	订购号 ^{①②}	
1/4	0.109	□□-T20M-4-6M	□□-T20M-4-20F
3/8	0.203	□□-T20M-6-6M	□□-T20M-6-20F
9/16	0.312	□□-T20M-9-6M	□□-T20M-9-20F
3/4	0.438	□□-T20M-12-6M	□□-T20M-12-20F
1	0.562	□□-T20M-16-6M	□□-T20M-16-20F
1 1/2	0.937	□□-T20M-24-6M	□□-T20M-24-20F


① 型号中的 6M 表示管子单根长度为 6 m, 20F 表示管子单根长度为 20 ft, 其他长度的短管也可提供。

② 在订购号中添加材料代码以获得完整的订购号: 316/316L 的代码为SS, 高级-316/316L 的代码为SH。

① In the ordering number, "6M" designator refers to 6 m tubing length and "20F" designator refers to 20 ft tubing length. Nipples in custom length available upon request.

② To order, add the material designator as prefix: SS for 316/316L and SH for enhanced-316/316L.

锥面螺纹短管
Coned and Threaded Nipples

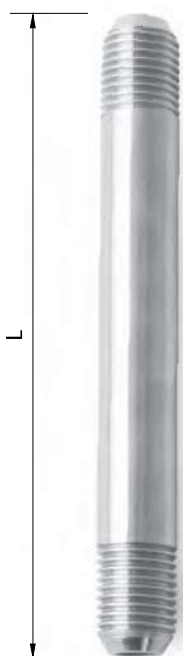

① 其他长度短管也可提供。

② 在订购号中

添加材料代码以获得完整的订购号:

316/316L 的代码为 SS

高级-316/316L 的代码为 SH

① Nipples in customized length available upon request.

② To order, add the material

designator as prefix:

SS for 316/316L

and SH for enhanced-316/316L.

外径 in.	内径 in.	长度 L ① mm (in.)	订购号 ②
1/4	0.109	76.2 (3.00)	□□ -T20M-4CT-3N
		101.6 (4.00)	□□ -T20M-4CT-4N
		152.4 (6.00)	□□ -T20M-4CT-6N
		203.2 (8.00)	□□ -T20M-4CT-8N
		254.0 (10.0)	□□ -T20M-4CT-10N
		304.8 (12.0)	□□ -T20M-4CT-12N
3/8	0.203	76.2 (3.00)	□□ -T20M-6CT-3N
		101.6 (4.00)	□□ -T20M-6CT-4N
		152.4 (6.00)	□□ -T20M-6CT-6N
		203.2 (8.00)	□□ -T20M-6CT-8N
		254.0 (10.0)	□□ -T20M-6CT-10N
		304.8 (12.0)	□□ -T20M-6CT-12N
9/16	0.312	101.6 (4.00)	□□ -T20M-9CT-4N
		152.4 (6.00)	□□ -T20M-9CT-6N
		203.2 (8.00)	□□ -T20M-9CT-8N
		254.0 (10.0)	□□ -T20M-9CT-10N
		304.8 (12.00)	□□ -T20M-9CT-12N
3/4	0.438	101.6 (4.00)	□□ -T20M-12CT-4N
		152.4 (6.00)	□□ -T20M-12CT-6N
		203.2 (8.00)	□□ -T20M-12CT-8N
		254.0 (10.0)	□□ -T20M-12CT-10N
		304.8 (12.0)	□□ -T20M-12CT-12N
1	0.562	152.4 (6.00)	□□ -T20M-16CT-6N
		203.2 (8.00)	□□ -T20M-16CT-8N
		254.0 (10.0)	□□ -T20M-16CT-10N
		304.8 (12.0)	□□ -T20M-16CT-12N
1 1/2	0.937	152.4 (6.00)	□□ -T20M-24CT-6N
		203.2 (8.00)	□□ -T20M-24CT-8N
		254.0 (10.0)	□□ -T20M-24CT-10N
		304.8 (12.0)	□□ -T20M-24CT-12N