


内螺纹三通
Female Tees

NPT 内螺纹				Male NPT Threads		
P NPT	产品编号 Product No.	尺寸数据, in(mm)				工作压力 psig(bar)
		L	F (厚度)	B	E	
1/8	-MFT-MN2	0.75 (19.1)	0.63 (15.9)	0.41 (10.4)	0.31 (8.0)	15000 (1034)
1/4	-MFT-MN4	1.00 (25.4)	0.75 (19.1)	0.59 (15.0)	0.41 (10.4)	15000 (1034)
3/8	-MFT-MN6	1.20 (30.6)	1.00 (25.4)	0.59 (15.0)	0.54 (13.8)	15000 (1034)
1/2	-MFT-MN8	1.50 (38.1)	1.37 (34.9)	0.78 (19.8)	0.67 (17.0)	15000 (1034)
3/4	-MFT-MN12	1.50 (38.1)	1.50 (38.1)	0.81 (20.6)	0.88 (22.3)	10000 (689)
1	-MFT-MN16	1.91 (48.5)	1.75 (44.5)	1.00 (25.4)	1.11 (28.2)	10000 (689)

ISO 锥管内螺纹				Male ISO Tapered Pipe Threads		
P BSPT	产品编号 Product No.	尺寸数据, in(mm)				工作压力 psig(bar)
		L	F (厚度)	B	E	
1/8	-MFT-MR2	0.75 (19.1)	0.63 (15.9)	0.41 (10.4)	0.31 (8.0)	15000 (1034)
1/4	-MFT-MR4	1.00 (25.4)	0.75 (19.1)	0.59 (15.0)	0.41 (10.4)	15000 (1034)
3/8	-MFT-MR6	1.20 (30.6)	1.00 (25.4)	0.59 (15.0)	0.54 (13.8)	15000 (1034)
1/2	-MFT-MR8	1.50 (38.1)	1.37 (34.9)	0.78 (19.8)	0.67 (17.0)	15000 (1034)
3/4	-MFT-MR12	1.50 (38.1)	1.50 (38.1)	0.81 (20.6)	0.88 (22.3)	10000 (689)
1	-MFT-MR16	1.91 (48.5)	1.75 (44.5)	1.00 (25.4)	1.11 (28.2)	10000 (689)

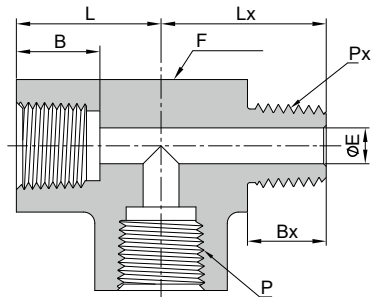

侧管外螺纹三通
Male Street Tees

NPT 外螺纹				Male NPT Threads					
P NPT	Px NPT	产品编号	尺寸数据, in(mm)						工作压力 psig(bar)
			L	Lx	F (厚度)	B	Bx	E	
1/8	1/8	-MST-FN2-MN2	0.75 (19.1)	0.75 (19.1)	0.63 (15.9)	0.41 (10.4)	0.38 (9.7)	0.31 (8.0)	15000 (1034)
1/4	1/4	-MST-FN4-MN4	1.00 (25.4)	1.06 (27.0)	0.75 (19.1)	0.59 (15.0)	0.56 (14.2)	0.41 (10.4)	15000 (1034)
3/8	3/8	-MST-FN6-MN6	1.20 (30.6)	1.20 (30.6)	1.00 (25.4)	0.59 (15.0)	0.56 (14.2)	0.54 (13.8)	15000 (1034)
1/2	1/2	-MST-FN8-MN8	1.50 (38.1)	1.61 (40.8)	1.37 (34.9)	0.78 (19.8)	0.75 (19.1)	0.67 (17.0)	15000 (1034)
3/4	3/4	-MST-FN12-MN12	1.50 (38.1)	1.77 (45.0)	1.50 (38.1)	0.81 (20.6)	0.75 (19.1)	0.88 (22.3)	10000 (689)
1	1	-MST-FN16-MN16	1.91 (48.5)	20.7 (52.5)	1.75 (44.5)	1.00 (25.4)	0.94 (23.9)	1.11 (28.2)	10000 (689)

ISO 锥管外螺纹				Male ISO Tapered Pipe Threads					
P BSPT	Px BSPT	产品编号	尺寸数据, in(mm)						工作压力 psig(bar)
			L	Lx	F (厚度)	B	Bx	E	
1/8	1/8	-MST-FR2-MR2	0.75 (19.1)	0.75 (19.1)	0.63 (15.9)	0.41 (10.4)	0.38 (9.7)	0.31 (8.0)	15000 (1034)
1/4	1/4	-MST-FR4-MR4	1.00 (25.4)	1.06 (27.0)	0.75 (19.1)	0.59 (15.0)	0.56 (14.2)	0.41 (10.4)	15000 (1034)
3/8	3/8	-MST-FR6-MR6	1.20 (30.6)	1.20 (30.6)	1.00 (25.4)	0.59 (15.0)	0.56 (14.2)	0.54 (13.8)	15000 (1034)
1/2	1/2	-MST-FR8-MR8	1.50 (38.1)	1.61 (40.8)	1.37 (34.9)	0.78 (19.8)	0.75 (19.1)	0.67 (17.0)	15000 (1034)
3/4	3/4	-MST-FR12-MR12	1.50 (38.1)	1.77 (45.0)	1.50 (38.1)	0.81 (20.6)	0.75 (19.1)	0.88 (22.3)	10000 (689)
1	1	-MST-FR16-MR16	1.91 (48.5)	20.7 (52.5)	1.75 (44.5)	1.00 (25.4)	0.94 (23.9)	1.11 (28.2)	10000 (689)