
INJECTION FITTINGS

双球密封防尘式注脂阀 **Double Ball Grease Fitting Vent Cup**

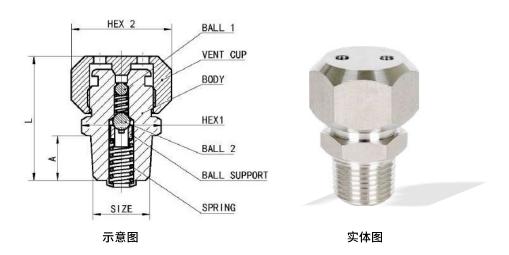

注料配件/Injection Fittings

制作

- 可选防尘罩
- 可增橡胶,金属,石墨填料密封
- 弹簧可选材质:Inconel625,718,750
- 钢球可选材质: 316L, Monel, Inconel 625
- 根据客户需求定制

Production

- · With or without vent cup
- · With or without o-ring
- · Short or long pattern
- · According to costumer drawing
- Ball STD in stainless steel 316 or on request in monel, inconel 625 Spring STD in stainless steel 316 or on request in inconel 718, 625 and 750

可选材质

- •碳炭钢A105或LF2
- 不锈钢316(L),304(L)
- 双相F51和超级双相F53,F55
- 其他特殊合金

Available materials:

- · Carbon Steel A105 or LF2
- Stainless Steel grade 316(L), 304(L)
- Duplex F51 and superduplex F53, F55
- · Other special alloys

| CODE | SIZE | L | Α | Hex1 | Hex2 |
|------------|---------|----|----|------|------|
| VFIF04N014 | 1/4"NPT | 50 | 17 | 25.4 | 32 |
| VFIF04N038 | 3/8"NPT | 50 | 17 | 25.4 | 32 |
| VFIF04N012 | 1/2"NPT | 50 | 17 | 25.4 | 32 |
| VFIF04N034 | 3/4"NPT | 52 | 20 | 30 | 32 |
| VFIF04N100 | 1"NPT | 56 | 25 | 34 | 32 |