


T20P系列/T20P Series

- ◎ 材质: 316/316L、高级-316/316L
- ◎ 最大工作压力: 1379 bar(20,000psig)
- ◎ 工作温度: -198°C至427°C (-325 °F至800°F)
- ◎ 冷拔1/8硬化无缝管
- ◎ 常规供货长度: 1m、2m、3m、6m、40in、80in、10ft、20ft,
- ◎ 可根据客户实际规格定制长度
- ◎ Materials:316/316L,enhanced-316/316L
- ◎ Working pressures: up to 20,000 psig (1379 bar)
- ◎ Working temperature:-325°F to 800°F (-198°C to 427°C)
- ◎ Cold-drawn 1/8-hard seamless tubing
- ◎ Standard length: 40 in, 80 in, 10 ft, 20 ft, 1 m, 2 m, 3 m and 6 m
- ◎ Customized length as per customer requirement is also available

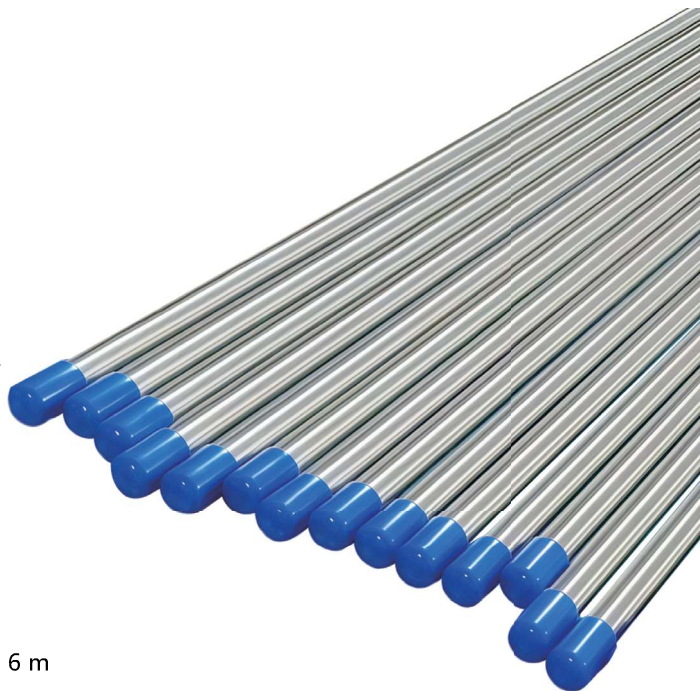

常温工作压力

Working Pressure at Ambient Temperature

外径 in	壁厚 in	工作压力 bar (psig)
1/4	0.065	1,379 (20,000)
3/8	0.083	
1/2	0.109	
3/4	0.165	
1	0.172	1,034 (15,000)



订购信息/Ordering Information

外径 in.	壁厚 in.	订购号 ①②③	
1/4	0.065	□□-T20P-4-065-6M	□□-T20P-4-065-20F
3/8	0.083	□□-T20P-6-083-6M	□□-T20P-6-083-20F
1/2	0.109	□□-T20P-8-109-6M	□□-T20P-8-109-20F
3/4	0.165	□□-T20P-12-165-6M	□□-T20P-12-165-20F
1	0.172	□□-T20P-16-172-6M	□□-T20P-16-172-20F

① 型号中的 6M 表示管子单根长度为 6 m, 20F 表示管子单根长度为 20 ft。

② 在订购号中添加材料代码以获得完整的订购号: 316/316L 的代码为SS, 高级-316/316的代码为SH。

③ 冷拔 1/8硬化无缝管不可与 15S 系列单卡套接头配合使用。

①In the ordering number, "6M" designator refers to 6 m tubing length and "20F" designator refers to 20 ft tubing length.

②To order, add the material designator as prefix: SS for 316/316L and SH for enhanced-316/316L.

③Cold-drawn 1/8-hard seamless tubing is not used with 15S series single-ferrule tube fittings.