


变径直通接头 (20,000psig)

Reducing Union (20,000psig)

20,000 psig (1378 bar)

T-管外径 OD In.	Tx-管外径 OD In.	产品编号 Product No.	尺寸数据 in.(mm)						
			A	C	Cx	D	F (六角)	G (六角)	Gx (六角)
3/8	1/4	-MPR-T06-T04	1.75 (44.5)	0.48 (12.2)	0.38 (9.7)	0.11 (2.8)	0.75 (19.1)	0.63 (15.9)	0.50 (12.7)
9/16	1/4	-MPR-T09-T04	2.00 (50.8)	0.55 (14.0)	0.38 (9.7)	0.11 (2.8)	1.00 (25.4)	0.94 (23.8)	0.50 (12.7)
9/16	3/8	-MPR-T09-T06	2.00 (50.8)	0.55 (14.0)	0.48 (12.2)	0.20 (5.1)	1.00 (25.4)	0.94 (23.8)	0.63 (15.9)
3/4	1/4	-MPR-T12-T04	2.25 (57.2)	0.59 (15.0)	0.38 (9.7)	0.11 (2.8)	1.38 (34.9)	1.19 (30.2)	0.50 (12.7)
3/4	3/8	-MPR-T12-T06	2.25 (57.2)	0.59 (15.0)	0.48 (12.2)	0.20 (5.1)	1.38 (34.9)	1.19 (30.2)	0.63 (15.9)
3/4	9/16	-MPR-T12-T09	2.50 (63.5)	0.59 (15.0)	0.55 (14.0)	0.31 (7.9)	1.38 (34.9)	1.19 (30.2)	0.94 (23.8)
1	1/4	-MPR-T16-T04	2.75 (70.1)	0.74 (18.8)	0.38 (9.7)	0.11 (2.8)	1.75 (44.5)	1.38 (34.9)	0.50 (12.7)
1	3/8	-MPR-T16-T06	2.88 (73.0)	0.74 (18.8)	0.48 (12.2)	0.20 (5.1)	1.75 (44.5)	1.38 (34.9)	0.63 (15.9)
1	9/16	-MPR-T16-T09	3.00 (76.2)	0.74 (18.8)	0.55 (14.0)	0.31 (7.9)	1.75 (44.5)	1.38 (34.9)	0.94 (23.8)
1	3/4	-MPR-T16-T12	3.00 (76.2)	0.74 (18.8)	0.59 (15.0)	0.44 (11.1)	1.75 (44.5)	1.38 (34.9)	1.19 (30.2)

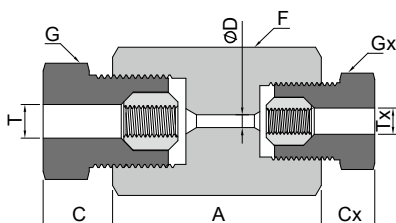

变径直通接头 (60,000psig)

Reducing Union (60,000psig)

60,000 psig (4134 bar)

T-管外径 OD In.	Tx-管外径 OD In.	产品编号 Product No.	尺寸数据 in.(mm)						
			A	C	Cx	D	F (六角)	G (六角)	Gx (六角)
3/8	1/4	-HPR-T06-T04	1.63 (41.3)	0.61 (15.6)	0.47 (11.9)	0.09 (2.3)	1.00 (25.4)	0.81 (20.6)	0.63 (15.9)
9/16	1/4	-HPR-T09-T04	1.75 (44.5)	0.95 (24.1)	0.47 (11.9)	0.09 (2.3)	1.38 (34.9)	1.19 (30.2)	0.63 (15.9)
9/16	3/8	-HPR-T09-T06	2.00 (50.8)	0.95 (24.1)	0.61 (15.6)	0.13 (3.2)	1.38 (34.9)	1.19 (30.2)	0.81 (20.6)