


20N(Tube接口, 三通) Tube Connection, 3-Way

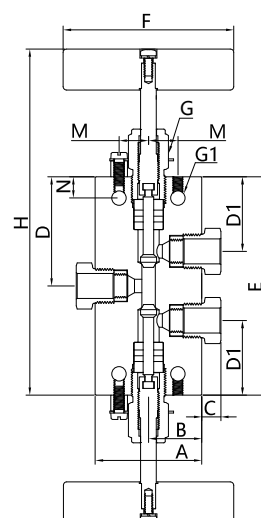

3通/2阀组/2 stem manifold															
订购号 Ordering Number	接口类型 Connection	内通径 in. (mm)	尺寸 in. (mm)												
			A	B	C	D	D1	E	F	G	G1	H	M	N	阀体厚度 Thickness
20NSS-MF4-6	1/4	0.125 (3.18)	2.00 (50.8)	1.00 (25.4)	0.38 (9.7)	1.69 (42.9)	1.19 (30.2)	3.38 (85.7)	3.00 (76.2)	0.75 (19.1)	0.22 (5.6)	6.23 (158.1)	0.62 (15.8)	0.38 (9.7)	0.75 (19.1)
20NSS-MF6-6	3/8	0.204 (5.18)	2.00 (50.8)	1.00 (25.4)	0.44 (11.2)	1.69 (42.9)	1.19 (30.2)	3.38 (85.7)	3.00 (76.2)	0.75 (19.1)	0.22 (5.6)	6.24 (158.6)	0.62 (15.8)	0.38 (9.7)	0.75 (19.1)
20NSS-MF9-6	9/16	0.312 (7.92)	2.50 (63.5)	1.25 (31.8)	0.55 (14.0)	2.56 (65.1)	1.75 (44.5)	5.13 (130.2)	4.00 (101.6)	1.00 (25.4)	0.34 (8.6)	8.44 (214.4)	0.69 (17.5)	0.50 (12.7)	1.00 (25.4)
20NSS-MF12-6	3/4	0.438 (11.13)	3.00 (76.2)	1.50 (38.1)	0.60 (15.2)	3.00 (76.2)	2.25 (57.2)	6.50 (165.1)	10.25 (260.4)	1.19 (30.2)	0.44 (11.2)	10.11 (257.0)	0.88 (22.4)	0.63 (16.0)	1.38 (35.1)
20NSS-MF16-6	1	0.562 (14.27)	4.12 (104.6)	2.06 (52.3)	0.74 (18.7)	3.75 (95.3)	2.81 (71.4)	7.50 (190.5)	10.25 (260.4)	1.62 (41.2)	0.56 (14.2)	12.32 (313.0)	1.25 (31.8)	1.13 (28.7)	1.75 (44.5)

注意：1.G为填料压盖安装孔的钻孔尺寸。

2.G1为支架安装孔直径。

3.所有针阀的面板安装孔尺寸均为：6.35mm

4.H为阀杆关闭位置时的尺寸。

5.所有尺寸仅供参考，可能会变动。如需其他相关尺寸，请联系XIPITEC或其授权代理商。

Notes: 1. G is the drill dimension of packing gland mounting hole.

2. G1 is the dimension of bracket mounting hole.

3. Panel mounting drill size: 0.25" all valves.

4. H is the dimension of stem in closed position.

5. All dimensions are for reference only and subject to change. For dimensions not shown above, please contact XIPUTEC Group or our authorized distributors.