


NPT螺纹接口球面密封单向阀 Pipe Ball Check Valves 15CO系列/Series: 1034 bar (15,000 psig)

特征/Features


- ◎ 工作温度:-79°C至204°C (-110°F至400°F)
- ◎ 用于预防介质回流, 适合不要求零泄漏关断的应用 (不能作为安全阀使用)
- ◎ 球与支架一体设计, 确保不会产生噪音; 轴向流动式阀瓣设计, 压降最小
- ◎ 阀盖与阀瓣有多种材质可供选择, 寿命更长
- ◎ Working temperature range: -110°F to 400°F (-79°C to 204°C)
- ◎ Prevent reverse flow where leak-tight shut-off is not mandatory (not for use as relief valve)
- ◎ An integral design of the ball and poppet to assure positive, in-line seating without "chatter".
Poppet is designed essentially for axial flow with minimum pressure drop
- ◎ Optional materials of cover gland and ball poppet for longer life

标准结构材料

Standard Materials of Construction

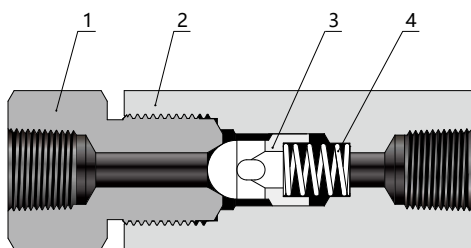

序号 Item	元件 Component	材料等级 Material Grade
1	阀盖螺母/Cover Gland	316SS
2	阀体/Valve Body	316SS
3	阀瓣/Poppet	S17400SS
4	弹簧/Spring	300Series Stainless Steel
润滑剂/ Lubricant		二硫化钼 / 氟化基 Molybdenum Disulfide/Fluorinated-Based

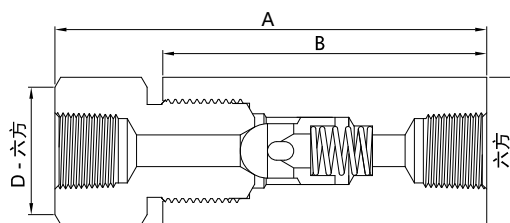

订购号 Ordering Number	接口类型 Connection	内通径 in. (mm)	Cv	尺寸 in. (mm)				工作压力 psig (bar)
				A	B	D - 六方	六方	
15COSS-FNS4	1/4 NPT	0.12 (3.05)	0.28	3.30 (83.8)	2.38 (60.3)	0.94 (23.8)	0.94 (23.8)	15,000 (1034)
15COSS-FNS6	3/8 NPT	0.22 (5.59)	0.84	3.95 (100.3)	2.88 (73.2)	1.13 (28.6)	1.13 (28.6)	15,000 (1034)
15COSS-FNS8	1/2 NPT	0.36 (9.12)	2.30	5.07 (128.9)	3.88 (98.6)	1.38 (34.9)	1.38 (34.9)	15,000 (1034)