


六角直通外螺纹接头

Hex Nipples

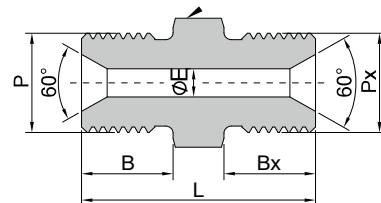

60°内锥外螺纹			Male Type "M"					
P UNF	Px UNF	产品编号 Product No.	尺寸数据 in(mm)					工作压力 psig(bar)
			L	F (六角)	B	Bx	E	
9/16-18	9/16-18	-MHN-MS9-MS9	1.34 (34.0)	0.63 (15.9)	0.50 (12.7)	0.50 (12.7)	0.09 (2.4)	60000 (4137)
3/4-16	9/16-18	-MHN-MS12-MS9	1.51 (38.3)	0.75 (19.1)	0.63 (16.0)	0.50 (12.7)	0.09 (2.4)	30000 (2068)
3/4-16	3/4-16	-MHN-MS12-MS12	1.64 (41.6)	0.75 (19.1)	0.63 (16.0)	0.63 (16.0)	0.29 (7.4)	30000 (2068)
7/8-14	9/16-18	-MHN-MS14-MS9	1.71 (43.5)	1.00 (25.4)	0.76 (19.2)	0.50 (12.7)	0.09 (2.4)	50000 (3447)
7/8-14	3/4-16	-MHN-MS14-MS12	1.84 (46.8)	1.00 (25.4)	0.76 (19.2)	0.63 (16.0)	0.15 (3.8)	30000 (2068)
7/8-14	7/8-14	-MHN-MS14-MS14	1.97 (50.0)	1.00 (25.4)	0.76 (19.2)	0.76 (19.2)	0.15 (3.8)	50000 (3447)
1-12	9/16-18	-MHN-MS16-MS9	1.60 (40.6)	1.00 (25.4)	0.64 (16.3)	0.50 (12.7)	0.09 (2.4)	30000 (2068)
1-12	3/4-16	-MHN-MS16-MS12	1.73 (43.9)	1.00 (25.4)	0.64 (16.3)	0.63 (16.0)	0.29 (7.4)	30000 (2068)
1-12	7/8-14	-MHN-MS16-MS14	1.85 (47.1)	1.00 (25.4)	0.64 (16.3)	0.76 (19.2)	0.15 (3.8)	30000 (2068)
1-12	1-12	-MHN-MS16-MS16	1.74 (44.2)	1.00 (25.4)	0.64 (16.3)	0.64 (16.3)	0.39 (10.0)	30000 (2068)
1.5/16-12	1-12	-MHN-MS21-MS16	1.86 (47.2)	1.37 (34.9)	0.62 (15.8)	0.64 (16.3)	0.39 (10.0)	20000 (1379)
1.5/16-12	1.5/16-12	-MHN-MS21-MS21	1.83 (46.6)	1.37 (34.9)	0.62 (15.8)	0.62 (15.8)	0.69 (17.5)	20000 (1379)

F